


### NOTICE

IF YOUR DRUM IS EQUIPPED WITH A RIM THAT CURLS IN TOWARD THE CENTER OF THE HEAD, USE THE ENCLOSED ADAPTOR KIT AND FOLLOW THIS PROCEDURE:

( SEE DIAGRAM )

### SENSOR ADAPTOR KIT INSTRUCTIONS

1. Replace 6-32 x 3/8" screw with 6-32 x 5/8" screw
2. Loosen and remove one drum head lug nut
3. Attach metal O ring to lug nut and retighten lug with corner of lug nut pointing toward the rim
4. Attach free end of spring to metal O ring
5. Pull bracket over drum rim, next to lug nut

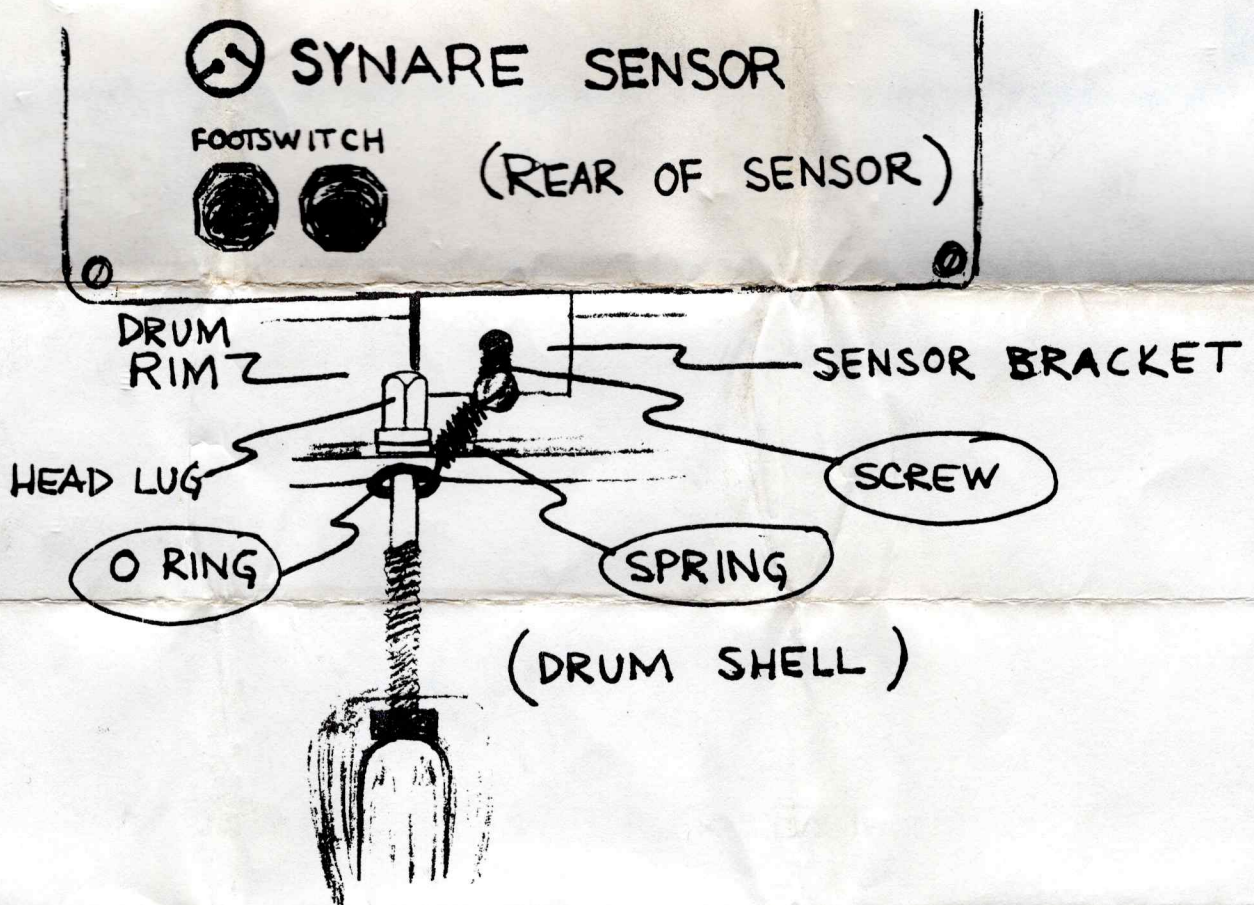

ADAPTOR KIT DIAGRAM FOR INSTALLATION